



**TRIPLE EFFECT SUCTION
CUP 3/4" AND 1"**

TRIPLE EFFECT SUCTION CUP

$\frac{3}{4}$ " AND 1"



The FLUM VALVES plastic hydraulic suction cup is a triple-effect hydraulic suction cup, with a basic opening and closing operation due to the pressure exerted by the water in the pipe. The suction cup is suitable for:


- Air venting at system start-up, while the pipes are filled.
- Air entry when turning off the system, while the pipes are drained.
- Discharge of small pockets of pressurized air during system operation

NOTABLE FEATURES:

Materials	
Body	Polyamide with fiberglass
Base	Polyamide with fiberglass or brass
Closing gasket	NBR
Float	Polypropylene
Tongue	EPDM*
Maximum working pressure	10 bar plastic 16 bar brass

*Can be manufactured for drinking water


NOTABLE FEATURES:

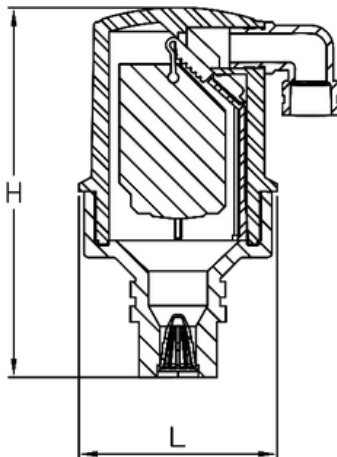


D.N.	h	l	Weight (Kg)	Connection
twenty	140	66	0.325 (plastic) / 0.750 (brass)	Thread
25	140	55	0.325 (plastic) / 0.750 (brass)	Thread

Air discharge capacity :


AV3FP and AV3FB 1" (DN25)
AUTOMATIC PURGE

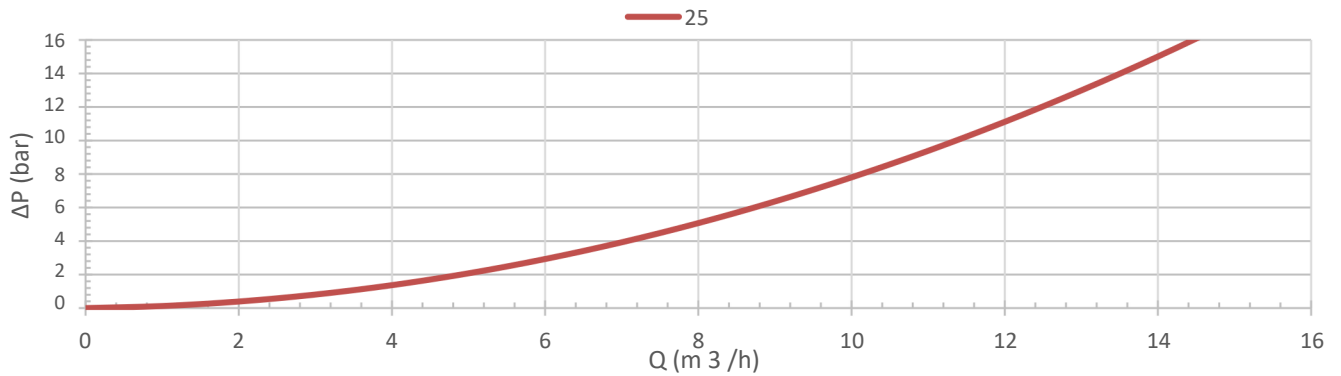


AV3FP and AV3FB 1" (DN25)
KINETIC PURGE

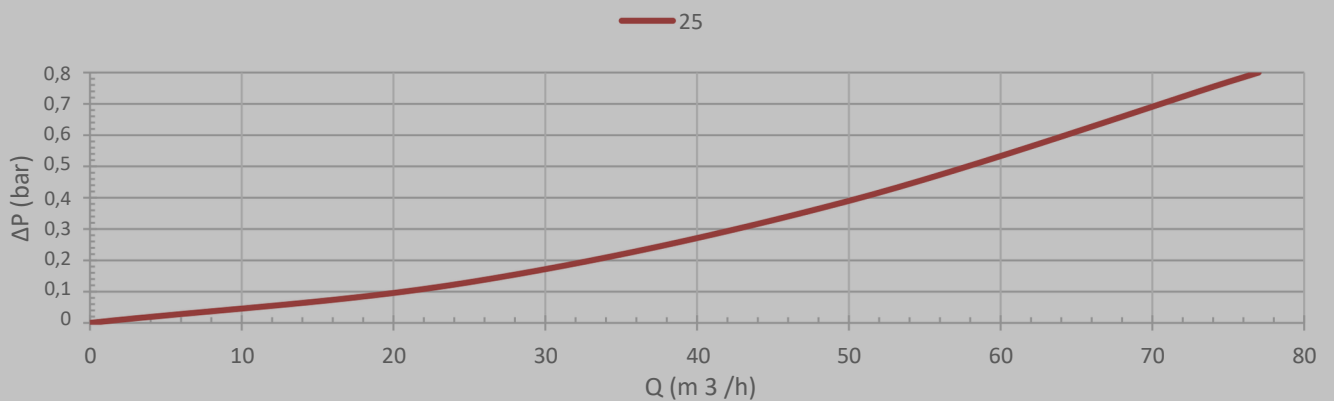

AV3FP and AV3FB 1" (DN25)
KINETIC ADMISSION

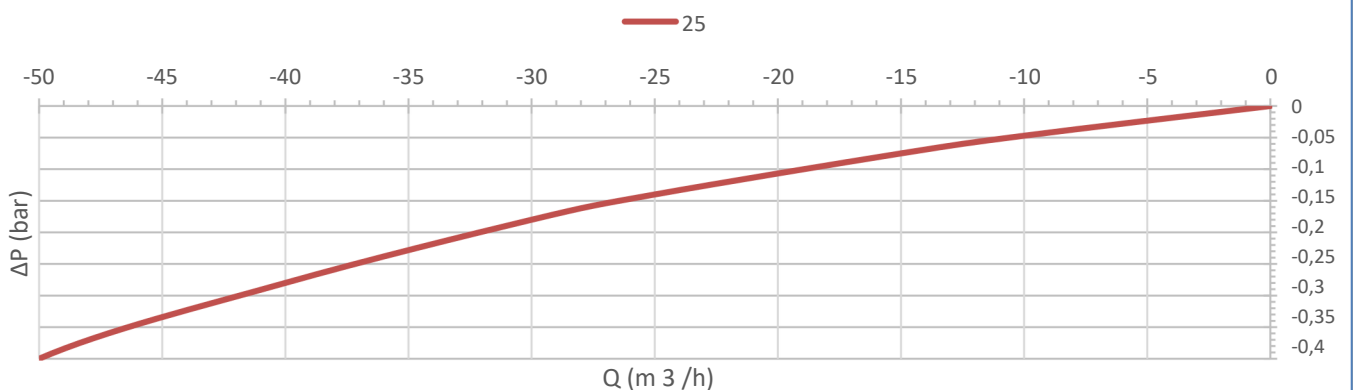

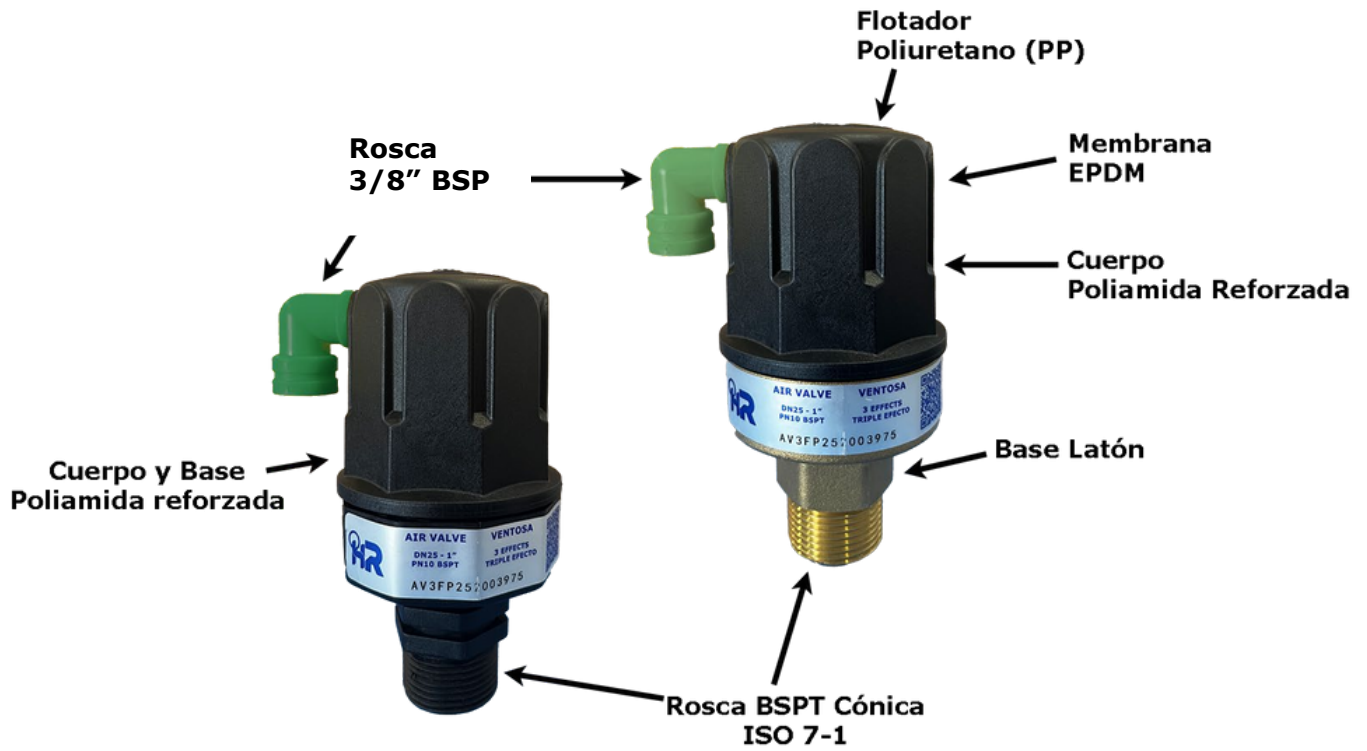



Hidráulica Romyspan se exime de responsabilidad respecto a errores de la información expuesta en este documento, la cual podrá ser modificada sin previo aviso. Todos los derechos están reservados. ©Copyright.



HIDRÁULICA ROMYSPAN S.L.
C/Bogotá s/n nave 1-2-3
Pol. Ind. LA SERRETA
MURCIA (30500)
España

TEL: +34 968 80 94 87

www.romyspan.com

info@romyspan.com

